
LED Recessed 8W Integrated Multi Downlight


IC-4 | TRI-CCT | Multi-frame | Dimmable | Thinner Profile | Damp location available



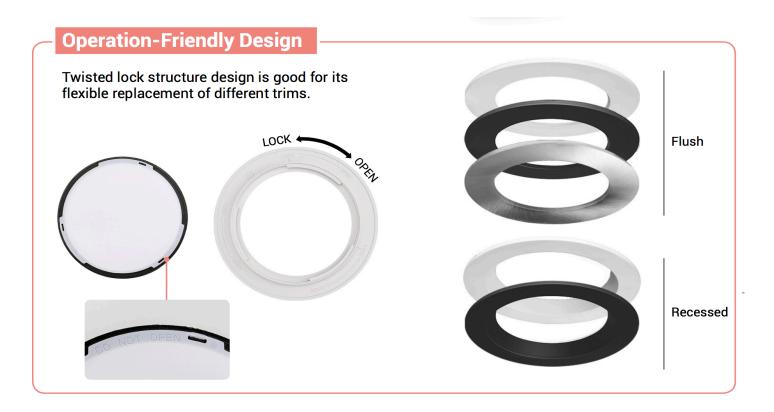

Muti-Color Setting

Pre-set button on the back of the lamp, you can choose 3000k, 4000k or 5000k as you preferred.

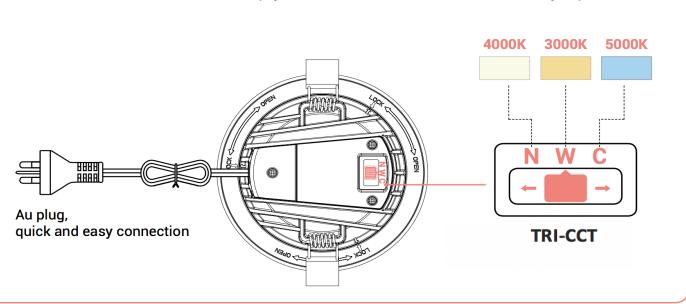




The thermal conductive heat sink and PC trim effectively ensure ideal heat dissipation effect. Its combination achieves material stability and also keep its elegant color aesthetics.

Thermal conductive nylon


PC




LED Chip



The Secret of the LEDs, Large LED chip, high-temperature resistant led bracket, 2835 LED with gold wire welding, with good temperature resistance and long service life, R9>15, providing more comfortable and vivid lighting color.



Power Supply



The power supply adopts imported electronic materials. It's digital phase-cut dimmable design can be compatible with most of conventional triac dimmers. It can automatically identify the type of dimmer and has good dimming smoothness. The power supply is designed with a protective circuit, which will stabilize the power and performance of the lamp during voltage fluctuation.







Product Description

The dimmable LED Down Light with the design of pre-set color temperature button and changeable trim is suitable for diverse architectural lighting solution. Its pre-set triple colour temperature design makes your room easier to be switched on whatever atmosphere you except. LUDow37NM-Mul Series is designed as an economy LED Recessed Down Light range that offers cost effective reliability.

- Up to 70% energy saving compared to standard CFL
- Long lifespan of 40,000 hours
- Dimmable & 120º wide beam angle
- ■IC-F / IC-4
- Triple colour temperature changeable Warm White 3000K,

Daylight 4000K & Cool White 5000K

- Trim changeable White, Chrome & Black
- Environment friendly, without Mercury or any other hazardous substances

Application notes

- IP54 for dry or damp location use
- Current licensed electrician for installation only
- Switch off before installation
- Do not touch when in use
- Keep away from hot steam and corrosive gas
- \blacksquare Suit triac dimmers including OPUS,Clipsal, HPM,Niko, Lumeo Domus, Lumeo Eco.










Specifications


| Power | 8W | | |
|---------------------|--------------------|---------|--------|
| Input Voltage | AC200-240V 50/60Hz | | |
| ССТ | 3000K | 4000K | 5000K |
| Lunmen output | 670lm | 775lm | 735lm |
| Efficacy | 90lm/w | 110lm/w | 99lm/w |
| CRI | >80 | | |
| Rated Input Current | 0.04A | | |
| PF value | >0.9 | | |
| IP Rated | IP54 | | |
| Dimmable | Yes | | |
| Beam Angle | 120° | | |
| Lifespan | >40,000Hrs | | |
| Warranty | 3 years | | |







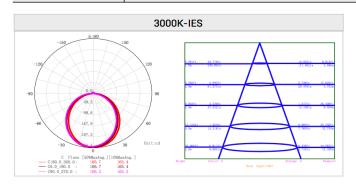


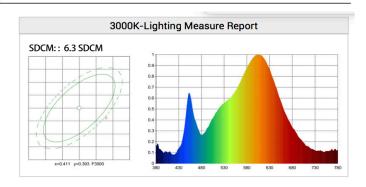



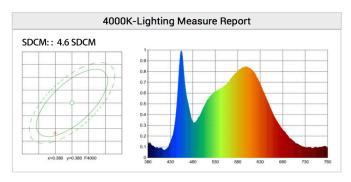

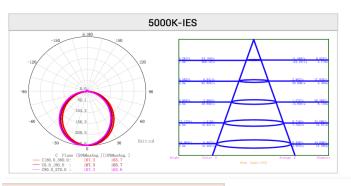

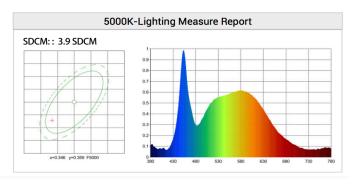






Specifications


| Power | 8W | | |
|---------------------|--------------------|---------|--------|
| Input Voltage | AC200-240V 50/60Hz | | |
| ССТ | 3000K | 4000K | 5000K |
| Lunmen output | 670lm | 775lm | 735lm |
| Efficacy | 90lm/w | 110lm/w | 99lm/w |
| CRI | >80 | | |
| Rated Input Current | 0.04A | | |
| PF value | >0.9 | | |
| IP Rated | IP54 | | |
| Dimmable | Yes | | |
| Beam Angle | 120° | | |
| Lifespan | >40,000Hrs | | |
| Warranty | 3 years | | |







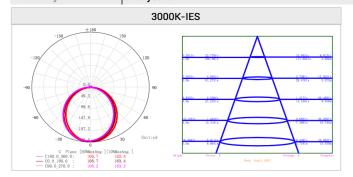


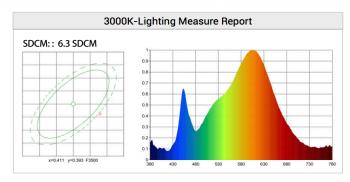

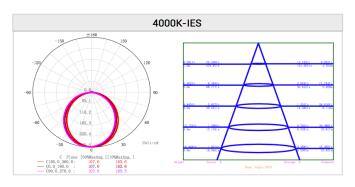

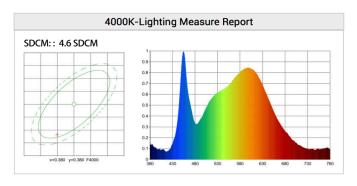

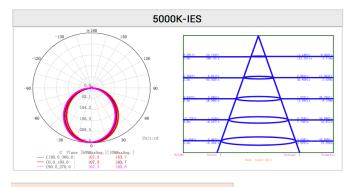

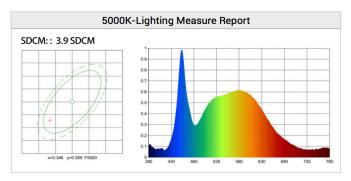





LIGHTUP NZ Limited T. 09 44 36 365

LIGHTUP NZ Limited
T. 09 44 36 365
E. info@lightup.net.nz
A. 7/25 Airborne Road, Rosedale, Auckland 0632
www.lightup.net.nz